



## | Climate

---

In Situ TEM **Gas and Heating**




we care  
**we innovate**  
we deliver

# Introduction

The Climate In Situ TEM Gas & Heating Solution enables the atomic resolution imaging of gas-solid interactions and sample dynamics in research areas such as catalysis, nanomaterials growth and corrosion studies.

Climate will convert your high vacuum TEM from a static imaging tool into a real-world research laboratory, enabling you to speed up your development of new catalysts or other energy-relevant materials and techniques.

Climate is the only environmental solution in the market that allows full dynamic correlation of structural and chemical data. This includes reaction-product analysis due to the integration with the optional dedicated DENSSolutions Gas Analyzer.

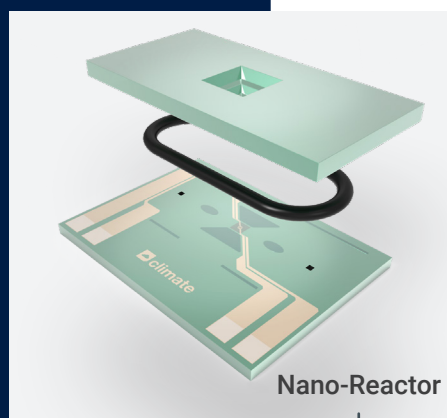

The DENSSolutions **Gas Analyzer** enables the analysis of reaction products, transforming Climate into a unique platform able to combine TEM-based data with information about the reaction kinetics.



The DENSSolutions Climate **Vaporizer** elevates your in situ experiments by enabling you to independently add water vapor to any gas mixture. Ultimately, you can work with and even humidify 3 different types of gases at once.

## Typical applications



Heterogeneous catalysis



Materials synthesis and growth




Corrosion of metals & alloys



Green energy materials

## Selected Publications

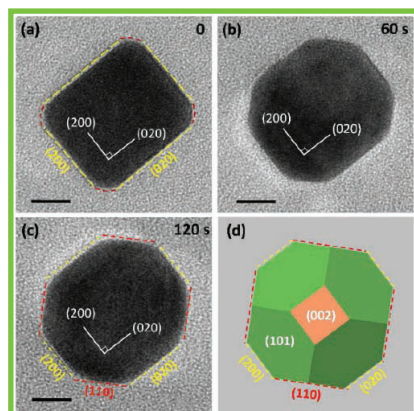


Time resolved in situ TEM images demonstrate the shape evolution of a Pd nanocrystals under 1 bar O<sub>2</sub> at 200 °C and the rebuilt Pd equilibrium structure by calculations. Scale bar: 5 nm.

### Nanocrystal shape evolutions

The Climate customers demonstrate an atomic scale TEM observation of shape evolutions of Pd nanocrystals under oxygen and hydrogen environment at atmospheric pressure. Combined with multi-scale structure reconstruction model calculations, the reshaping mechanism is fully understood.

These results give a direct insight into the behavioural response of nanoparticles to a 'real' reactive pressure environment, which is likely to improve the understanding of solid-gas reaction during catalytic applications.

Zhang, Xun et al. *Chemical Communications* 53 (2017) 13213-13216

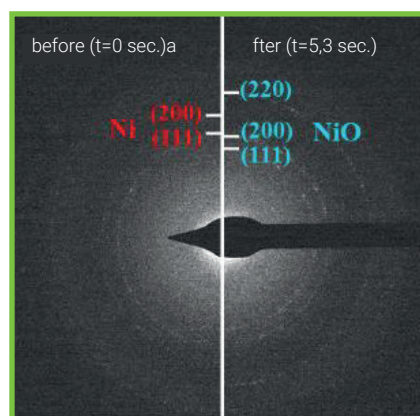


In Situ selected area electron diffraction (SAED) images. In Situ conditions: T = 600 °C, 200 mbar O<sub>2</sub>, 800 mbar N<sub>2</sub>, Flow = 0,6 ml/min. .

### Nanoparticle reaction kinetics

Acquiring the kinetics of gas-nanoparticle fast reactions under ambient pressure is a challenge owing to the lack of appropriate in situ techniques. Using our Climate system and time-resolved in situ electron diffraction, the researchers develop a new approach that allows quantitative structural information to be acquired under ambient pressure with millisecond time resolution.

They were able to vividly obtain the ultrafast oxidation kinetics of Ni nanoparticles in oxygen. Ultimately, this study gives new insights into Ni oxidation and paves the way to study the fast reaction kinetics of nanoparticles using ultrafast in situ techniques.

Yu, Jian et al. *Angewandte Chemie* (2018)

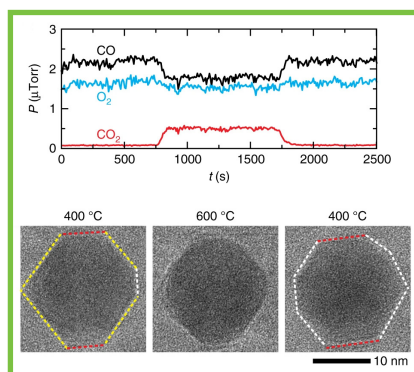

The measurements of the CO, O<sub>2</sub>, and CO<sub>2</sub> content in the outlet gas stream during the experiment. The TEM images show the sequence describing the morphological changes in a Pd nanoparticle at different temperatures.

### Thermal catalysis

The availability of active sites on a catalyst's surface determines its dynamical structure. However, the way that nanoparticle (NP) catalysts re-structure under reaction conditions and how these changes relate to the catalytic activity is not yet fully understood.

Using Climate and operando transmission electron microscopy, the authors find that palladium NPs show reversible structural and activity changes during heating and cooling in mixed gas environments containing O<sub>2</sub> and CO. Conclusively, these results show how gas environments can alter the structure of NPs, even at relatively low temperatures and have important implications for our understanding of how CO adsorption can affect NP surfaces.

Chee, See Wee et al. *Nature Communications* 11 (2020) 2133

# Why Climate?

1



## State-of-the-art environmental control

### 1. Dynamic mixing

Our patented mixing valve enables you to change the gas composition on the fly.


### 2. Fast switching

Alter the gas environment within seconds.

### 3. Independent control

Independently control gas composition, pressure and flow rate with a wide experimental range.

2

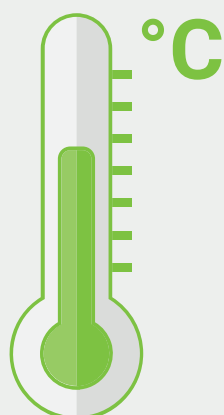

## Accurate temperature control



### 1. Temperature accuracy and stability in gas environment

4-point probe heating provides the most accurate temperature control even during dynamic conditions.

### 2. Acquire calorimetry data

Monitor heat dissipation and absorption during endo- or exothermic reactions with high sensitivity.

3



## Reliable experiments

### 1. Predefine the experimental conditions

Define your optimal experimental conditions before using the TEM by attaining ex situ mass spectrometry data with Climate.

### 2. High stability

Achieve atomic resolution in TEM and STEM in static and flow modes.

### 3. Optimized analytical capabilities

The optimized design enables EELS and large solid-angle EDS collection.

### 4. Clean experiments

The modularity of the holder enables easy on-site exchange and cleaning of all critical components.



# Software for integrated control and data


## Impulse 1.1

### Intuitive In Situ experiment control and automation software

Impulse 1.1 grants you complete control over your stimuli. It offers an integrated control interface that is flexible to adapt to your experiment. You can even design your In Situ experiment from your desk. Decide which sample conditions you want to be met at which time and Impulse will do the rest.

#### Smart automation

- Easily design your experiment with the drag-and-drop profile builder.
- Smart automation keeps track of measurements and ensure that your sample conditions are met.
- Accurately reproduce your experiments.


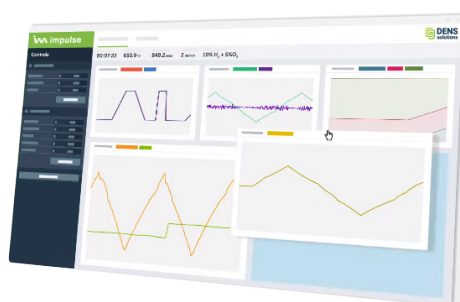


#### Flexible dashboard

- Plot any number of parameters that are important for your experiment.
- Arrange and resize the graphs so that you never miss a thing.
- Quickly find correlations and make real-time decisions.

#### Data integration

- Synchronize your stimuli data with other data from your experiment.
- Provide your camera and detector images with stimuli annotations in seconds.

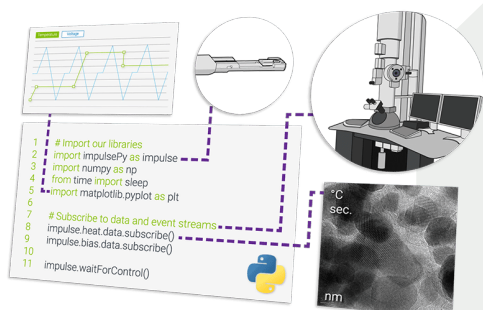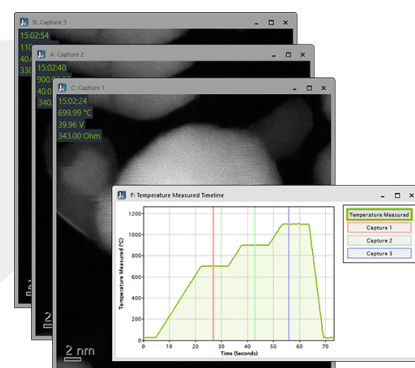

#### Experimental freedom

- The Impulse application programming interface (API) and Python module lets you control your system using Python scripts. This offers unbound freedom in experiment control.
- Automate and synchronize data collection of cameras and detectors with the control of the stimuli.

# System specifications

|                             | Climate Air                      |                | Climate GVB | Climate G+     |
|-----------------------------|----------------------------------|----------------|-------------|----------------|
| Heating control mode        | 4-point probe resistive feedback |                |             |                |
| Heating range               | RT - 1,000 °C                    |                |             |                |
| Heating & cooling rate      | Up to 150 °C/sec                 |                |             |                |
| Temperature stability       | ≤ ± 0.01 °C                      |                |             |                |
| Pressure range              | Ambient                          | 0 - 1,000 mbar |             | 0 - 2,000 mbar |
| Resolution*                 | ≤ 100 pm                         |                |             |                |
| Drift rate*                 | ≤ 0.5 nm/min                     |                |             |                |
| Modular holder design       | Yes                              |                |             |                |
| On-chip flow channel        | Yes                              |                |             |                |
| Mass Spectrometer           | 0 - 200 AMU                      |                |             |                |
| Gas mixing method           | N/A                              | Discrete       |             | Continuous     |
| Mixing flammable mixtures   | N/A                              | No             |             | Yes            |
| Gas switching               | N/A                              | Up to 10 min   |             | ≤ 15 sec       |
| Gas input lines             | N/A                              | 3              |             | 3              |
| Gas flow range (normalised) | Static                           | 0 - 1 ml/min   |             |                |
| Micro-calorimetry           | Yes                              |                |             |                |
| EDS compatibility**         | Yes                              |                |             |                |
| EELS compatibility          | Yes                              |                |             |                |

\* Depending on microscope configuration

\*\* Depending on pole piece geometry and EDS configuration

| JEOL              | Climate Air                                      | Climate GVB | Climate G+ |
|-------------------|--|-------------|------------|
| Modes             | TEM, STEM, EDS, EELS, diffraction                |             |            |
| Alpha tilt range* | UHR, FHP = limited, HRP ≥ ±15 deg, WGP ≥ ±21 deg |             |            |

\* Depending on microscope configuration

| Thermo Fisher Scientific | Climate Air  | Climate GVB | Climate G+ |
|--------------------------|--|-------------|------------|
| Modes                    | TEM, STEM, EDS, EELS, diffraction                  |             |            |
| Alpha tilt range*        | C-TWIN, TWIN ≥ ± 35 deg, X-TWIN, S-TWIN ≥ ± 25 deg |             |            |

\* Depending on microscope configuration

# Complete 'plug & play' package

1. Climate TEM specimen holder
2. Nano-Reactor starter pack
3. Heating control unit\*
4. Laptop with pre-installed software
5. Chip alignment setup
- 6a. Gas Supply System for Climate GVB
- 6b. Gas Supply System for Climate G+
7. Vaporizer (optional)
8. Gas Analyzer (optional)

\* Integrated inside the GSS for Climate GVB and G+ (6a. and 6b.)

**Including:**  
Supporting tools



## Service and Support

**Product warranty**

24 months with optional extension

**Regulatory compliance**

CE, RoHS, FCC

**Radiation safety**

According to TEM manufacturers compliance regulations



#### DENSsolutions

Informaticalaan 12  
2628 ZD Delft  
The Netherlands

Phone: +31 (0) 153 030 214  
Email: [info@DENSsolutions.com](mailto:info@DENSsolutions.com)  
[www.DENSsolutions.com](http://www.DENSsolutions.com)

To find your local distributor, please visit:  
[www.DENSsolutions.com/distributors](http://www.DENSsolutions.com/distributors)



**AXT PTY LTD**  
Authorised Distributor  
DENSsolutions  
Australia & New Zealand


1/3 Vuko Place  
Warriewood  
NSW 2102 Australia

+61 (0)2 9450 1359  
[axt.com.au](http://axt.com.au)  
[info@axt.com.au](mailto:info@axt.com.au)

 | **Wildfire**  
Heating

 | **Lightning**  
Heating + Biasing

 | **Climate**  
Gas + Heating

 | **Stream**  
Liquid + Biasing or Heating

Copyright © 2021 DENSsolutions B.V. All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by DENSsolutions B.V. All rights reserved. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission.

Version 3.0